



7 000psi hot water ~ 1 square yard a minute.



Remove scale rust.



No need for negative air containment or abrasive blast materials.



Remove loose paint, loose rust and salts.


Simple geotechnical cloth has proven adequate filtration with used powerwash water not revealing any lead content.





Rubber mats
On platform floors.

Water recovery system consists of :
Flow-thru tarps (less wind drag),
Rubber mats to collect and guide water.
Trash pump to direct water to a settling tank.
25, 5, then 1 micron pool filters before
reusing water.

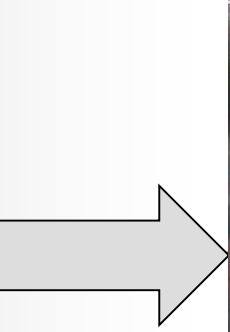

25 > 5 > 1 micron filters.



Simple water recovery system.



Scale rust, loose paint, loose salts removed. Steel ready for overcoating..




Chain link wire used to capture water for recycling.



Flo-Thru tarps



Coating rarely requires enclosures.

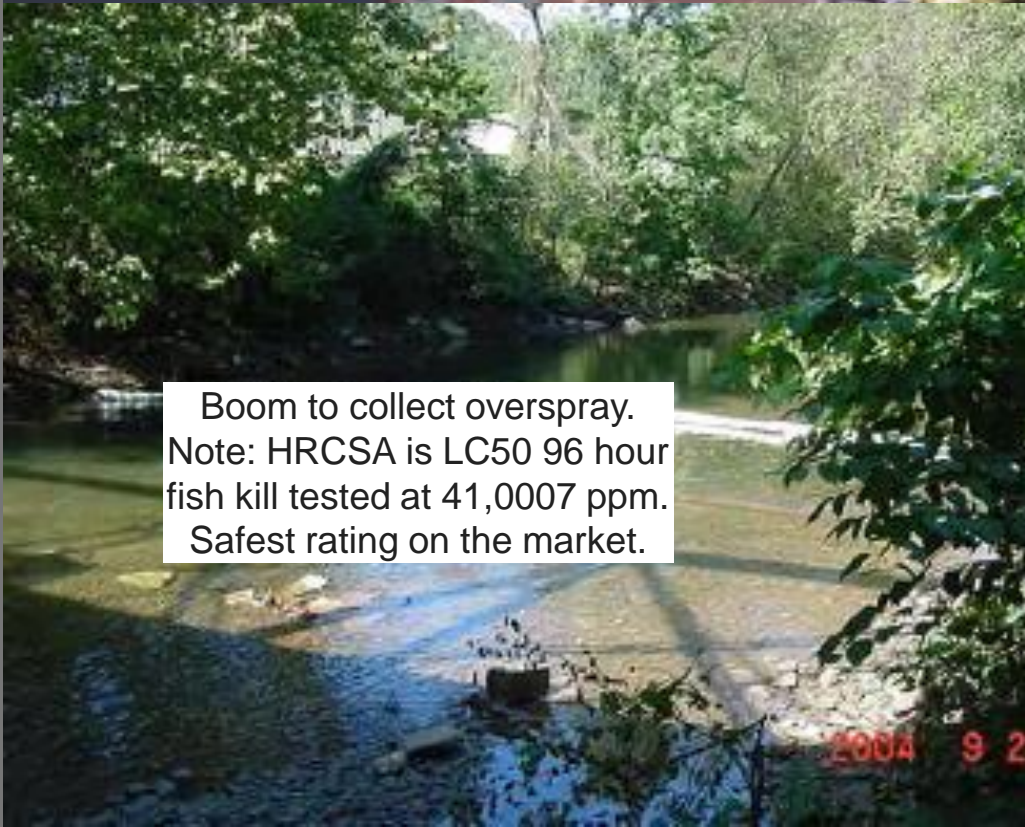

Boom to collect overspray.
Note: HRCSA is LC50 96 hour
fish kill tested at 41,0007 ppm.
Safest rating on the market.





Conclusions

- Less equipment / less emissions.
- Geotextile filtered water has passed many tests.
- Water recovery is simple and requires simple trash pumps, pool filters, etc.